





GROUND BASE PALLET

GB-01

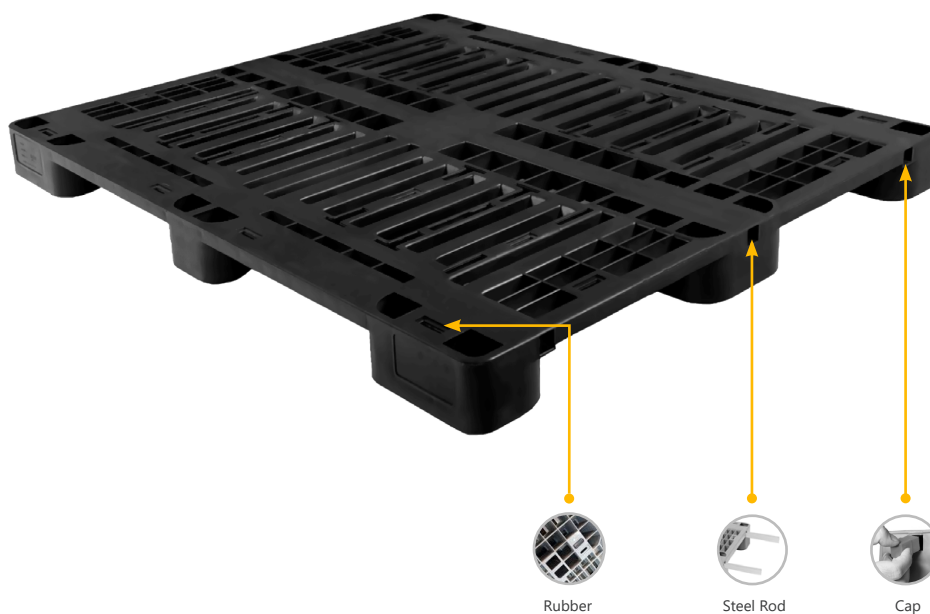

Pallets for ultimate ground protection, made from quality plastic materials. It can provides tough and sturdy surfaces for construction sites, parking lots, driveways, pathways, access roads, events, sporting venues, holiday parks, wet areas, cold stores and warehouses that need underneath air circulation to protect from humidity and liquid spill. It has many benefits based on practical experience as a protection that suits any application.

TECHNICAL DATA

Pallet Name	Interior Use	
Dimensions LxWxH (cm)	120x100x8	
Steel Enforcement	Without	With
CODE	GB-01	GB-01/S
Static Loading (kg)	700	1000
Dynamic Loading (kg)	300	500
Racking Loading (kg)	100	200
Structure		
Standard Color		
Container Load [40' HC]	589 PCs	
Standard Truck Load	1040 PCs	
Rackable		

AVAILABLE WITH

Safety Lips	✗	Caps	✓	Anti-Slip Rubber	✓
Client LOGO Printed	✗				

OPTIONS ON REQUEST

Steel enforcement	✓	Client LOGO Engraved	✓	RFID	✓
Customized Color	✓	Fire Retardant	✓		

ADVANTAGES

- ✓ Anti-impact perimeter
- ✓ Large window operations for easy handling
- ✓ Plastic pallets have fewer or no repairs.
- ✓ Plastic pallets improve efficiencies due to standard dimensions and lack of broken board.
- ✓ Plastic pallets offer better product protection no nails or broken boards to damage payload.
- ✓ Plastic pallets offer better stability no damaged or missing boards causing spills or falling stacks.
- ✓ Plastic pallets improve safety and lower workers compensation claims.
- ✓ Plastic pallets allow for greater utilization of warehouse space stability and higher stacking.

Recommendations for use

- ✓ Do not stack more than 30 pallets, which is equivalent to a height of 4.65 m when empty.
- ✓ Once stacked in height check that they are properly fitted.

- The values indicated are approximate and are based on practical experience and ISO 86111-, evenly distributed load over pallet surface, at ambient temperature (23 °C) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.
- Due to the characteristics of plastic materials and manufacturing process, the dimensions and the weight of the pallets may present certain tolerances.
- The specification can be affected in case of alteration of the product with parts and / or materials different from those approved by the RePall quality department.
- RePall reserves the right to modify any information herein indicated without prior notice.
- Any warranty, specification or liability on the part of RePall will be terminated in case of modification of the product with spare parts not supplied by RePall.